

TRUFLUX

HIGH RESOLUTION DIGITAL TANK FLOOR PLATE SCANNER

ADVANTAGES

- + Efficient and Effective Mechanical Design.
- + Superior Resolution (5.2mm x 1mm).
- + Lightweight - 32kg including battery.
- + Easy to Transport - Total shipping weight under 60kg (not including the laptop).
- + Efficient Reporting via the PC Laptop or USB.
- + Unique Damping System Provides Easy Lift-off.
- + High-resolution optical encoder (positional accuracy of ± 1 mm over a 20-meter scan track).
- + Fast track-to-track scanning images - All file and directory handling is produced automatically, resulting in significantly faster track-to-track scanning speed.
- + USB Connectivity meaning that the TruFlux effectively works as a simple "plug-and-play" unit.
- + Off the Shelf Battery Technology.



INTRODUCTION

The TruFlux FS1 is a new concept in Magnetic Flux Leakage (MFL) tank floor plate inspection, incorporating a new level of user sophistication in its innovative design. The FS1 has the benefits of advanced features and practicality.

The FS1 is a fully self-propelled high-resolution digital scanner, capable of producing highly accurate topographical images of 6-12mm storage tank floor plates.

Particular attention has been paid to the mechanical design of the FS1. Notably in its physical size, the FS1 weighs just 32kg

inclusive of its slip-in-slip-out lithium ion battery pack.

Yet with its advanced design, no functionality has been compromised; in fact, significant advancements in floor plate inspection have been incorporated into the FS1 system design.

The TruFlux FS1 system is easy to use and highly practical. The FS1 folds down into a locked transport position, with the operation of just one lever. With its reduced physical size and lower weight, handling and set-up require little effort.



INNOVATION

The FS1 incorporates a damping system designed to alleviate the usual high forces required to break magnetic contact. The active damping system controls the scanner lift-off and placement in one easily controlled motion, greatly reducing any high levels of mechanical loading.

The DAQ Software has been developed for both touch-screen and standard pc applications. With fast control function set-up allowing less operator inputs per scan, resulting in faster plate scan time. Auto-hierarchical directory construction eliminates possible overwrites or “non-save” issues.

It is well documented that for this type of magnetic flux leakage technique, speed variations whilst scanning cause adverse effects on data quality. TruFlux employs a proprietary Speed Compensation Algorithm to help remove spurious indications arising from this anomaly. In addition all scanning speeds are cross-correlated back to the calibration and kept within controlled margins.

Particular attention has been paid to data acquisition, data handling and communication protocols. The entire electronics package is housed within the fully ruggedized scan-head enclosure, powered only by the USB; effectively the FS1 has become a simple plug-and-play device. This greatly improves site reliability, as complex electronics and connectivity are susceptible within harsh environments.

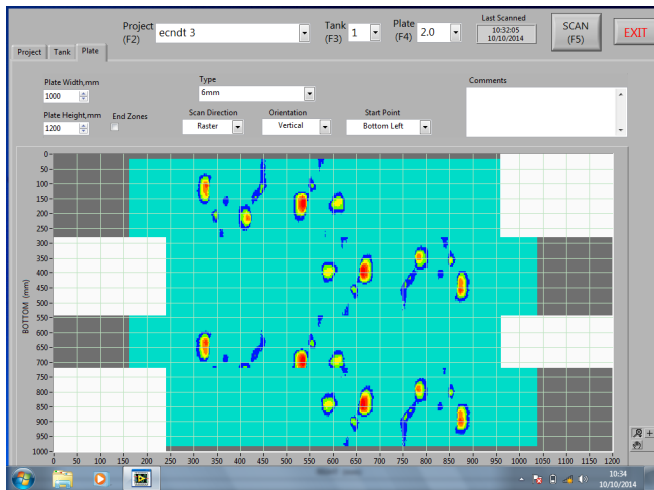


Figure 1: TruFlux Raster Scan

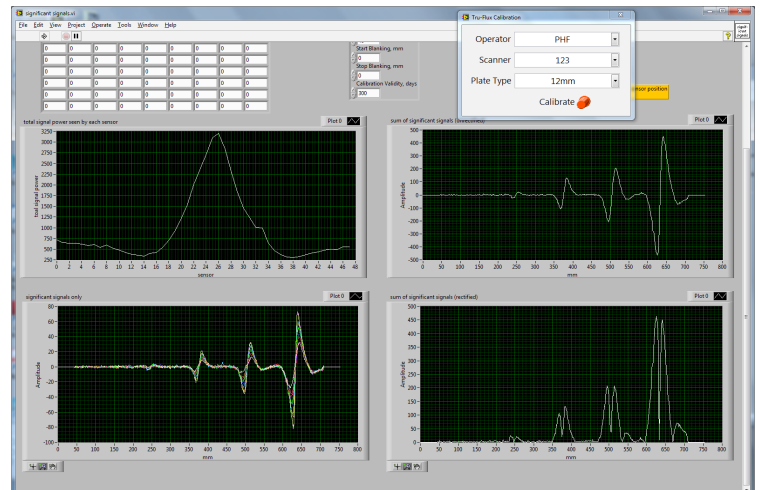


Figure 2: TruFlux 12mm Plate Calibration Signals

TRUFLUX FS1 - A New Chapter in Floor-Plate Inspection

Algorithms developed to filter flux leakage distortion, provide the operator and client a greater understanding of the visual data displays. Point-to-point data samples from 48 channels are stored in each track run and can be cross-correlated with subsequent inspections for predictive corrosion growth analysis.

Baugh & Weedon's Magnetic Flux Leakage (MFL) floor-plate scanner introduces a new dynamic to tank floor inspection. The TruFlux high-resolution scanning system offers an unparalleled level of inspection.

HIGH LEVEL OF POSITIONAL ACCURACY:

The high-resolution optical encoder gives a positional accuracy of ± 1 mm over a 20-meter scan track.

DIGITAL RESOLUTION:

Readings from 48 hall affect sensors are captured and digitised every 1.0 mm of forward travel at a scanning speed of 500mm p/sec.

AUTO DRAWING, SCALING AND FILE HANDLING:

The Software produces a full-scale drawing of the tank floor, with auto numbering of plates and tracks including annular rings. Scanned plots of tracks are auto-positioned onto plates; as are the plates into the tank image.

All file and directory handling is produced automatically, resulting in significantly faster track-to-track scanning speed.

Unrivalled data image display reveals any material loss as a high-resolution corrosion map with additional controls for zooming, panning and saving images.



Threshold sensitivity can be adjusted to client requirements along with colour choice, so if required, any indication over a set percentage loss can be set to a single colour.

Once operator inputs have been selected an automatic plate scan strategy is generated. The operator has then only to follow the on-screen guidance. The operator can additionally choose to select end zone scanning.

The DAQ software has a Preliminary PDF report output function, enabling the on-site operator to leave a first draft report upon inspection completion. This enables the client to be immediately reactive to possible issues.

OVERLAY FEATURE:

Past inspection results can be overlaid in both tank, plate and track format. Providing the engineer an indication of corrosion growth/ trends and help with predictive analysis.

DESIGN FEATURE:

The TruFlux uses Lithium-ion battery technology with push-pull hot swappable ability. A fast recharge function and four batteries per unit provides 24hr utilisation.

SPECIFICATION

Principle Of Operation	Magnetic Flux Leakage
Detection	48 hall effect sensors
Scan Width	300mm
Method Of Propulsion	dc motor
Speed	500mm/s
Thickness Range	6-20mm
Test Through Coatings	Yes
Maximum Coating Thickness	6mm
Max Sensitivity	20%
Auto-Stop	No
Power Requirements	24v
Transit Case	Meets IATA requirements for transporting magnetisable material
Operating Weight	32kg
Stop On Defect	No
Real Time Analysis	Yes
Real Time Averaging	Yes
Real Time Digital Signal Processing (DSP)	Yes
Freeze Screen Alarm	No
Linear Resolution	0.5mm
Speed Compensation Algorithm	Yes
Digital Data Storage	48 channels X 0.5mm
Scan Length	Unlimited
Scan Plate End Zones	Yes
Adjustable Sensitivity Range	Yes
Optional Laser Guide	Yes
Fully Dampened Magnetic Contact	Yes
Assisted Magnet Lift-Off	Yes - minimal effort required to break magnet contact resulting in considerably less operator fatigue
Scan Length Alignment While In Magnetic Contact	Yes - The scan track can be fully aligned when magnet is in contact with plate, alleviating the need to break contact if track alignment was not achieved.

AGENT / DISTRIBUTOR



Document number BR1016: Issue 1

Baugh & Weedon Ltd.

Beech Business Park, Tillington Road, Hereford, HR4 9QJ

Tel: +44 (0)1432 267671 Fax: +44 (0)1432 359017 Email: sales@bw-nde.com www.bw-nde.com